




Temperature	Capacity
70°F	10,000
75°F	11,000
80°F	12,000
85°F	13,000
90°F	14,000
95°F	15,000
100°F	16,000

LENNOX
Innovation never felt so good.®

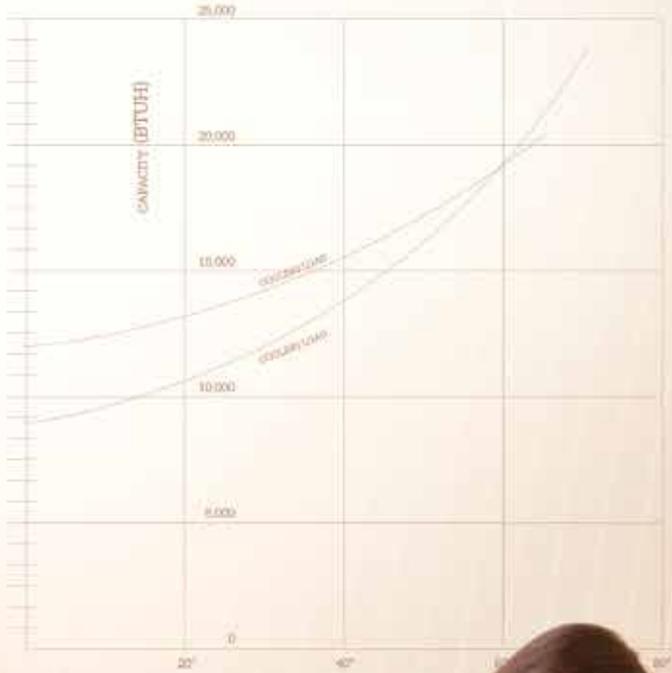

comfortable anywhere



Mini-Split
Systems



MS8C

Lennox®
8 Series ductless
air conditioners

Get year-round comfort anywhere you want

Lennox® 8 Series Ductless Mini-Split air conditioners provide a smart, energy-efficient way to cool a specific room in your home. Maybe you have a sunroom that's just a little too warm in the summer. Or a room addition that isn't connected to your ductwork. Perhaps you have a media room that generates a lot of extra heat. Now, thanks to Lennox, any room can be comfortable without a complicated installation.



A proud new addition to the Lennox family

For decades, Lennox has been trusted to deliver unsurpassed innovation in home comfort. Mini-Split air conditioners are no exception. **Each one is designed to deliver ultra-quiet comfort wherever you need it**—all in a small, attractive package that blends into any room. And with efficiency ratings up to 22 SEER Mini-Split systems can keep you comfortable without generating high utility bills. They're also protected by a 5-year limited parts warranty (includes compressor).*



*Applies to residential applications only. See actual warranty certificate for details.

Smart, secure and very comfortable

When only certain rooms need cooling, MS8C Mini-Split air conditioners provide an ideal solution. **Unlike window units, a Mini-Split system doesn't leave you vulnerable to insects, weather elements and theft.**

Designed for easy installation, Mini-Split systems use a compact indoor unit and an outdoor unit connected through a small hole in your wall. This not only helps keep your home secure, but it also allows the system to move heat out of your home quickly and efficiently, while using energy wisely. It's just the kind of innovation you'd expect from Lennox.

Enjoy the convenience of staying in your ideal comfort zone

The wireless remote control for the 8 Series Mini-Splits is equipped with a sensor that measures the air temperature in the room and automatically signals the system to adjust to the set temperature. With the remote nearby you'll always have the comfort of knowing the temperature of the air surrounding you is just where you want it.



rest easy and comfortably anywhere

A lot of comfort without a lot of noise

Every Mini-Split system creates an environment that is as quiet as it is comfortable. Considering a whisper is 20 decibels and light rainfall is 30 dB, Mini-Split air conditioners, **with indoor sound levels as low as 26 dB and outdoor levels as low as 50 dB, are hardly noticeable****. But the crisp, refreshing air is hard to miss.


Slow and steady keeps it efficient

Lennox Mini-Split systems use advanced inverter technology that keeps cooled air flowing without the typical stops and starts associated with conventional systems. The digital inverter acts as the brains of the system, sending signals to the compressor motor to step up or decrease speed based on changes in temperature outside and inside rooms. As speed is adjusted, a magnetic field controls the motor's rotation, assuring perfectly smooth operation at all times. This exceptionally high precision offers greater energy efficiency and minimal temperature swings.

Lennox® 8 Series Mini-Split systems work great in any room

- Sunrooms
- Media rooms
- Room additions/
Bonus rooms
- Home offices
- Upstairs bedrooms

Ductless Mini-Split Systems

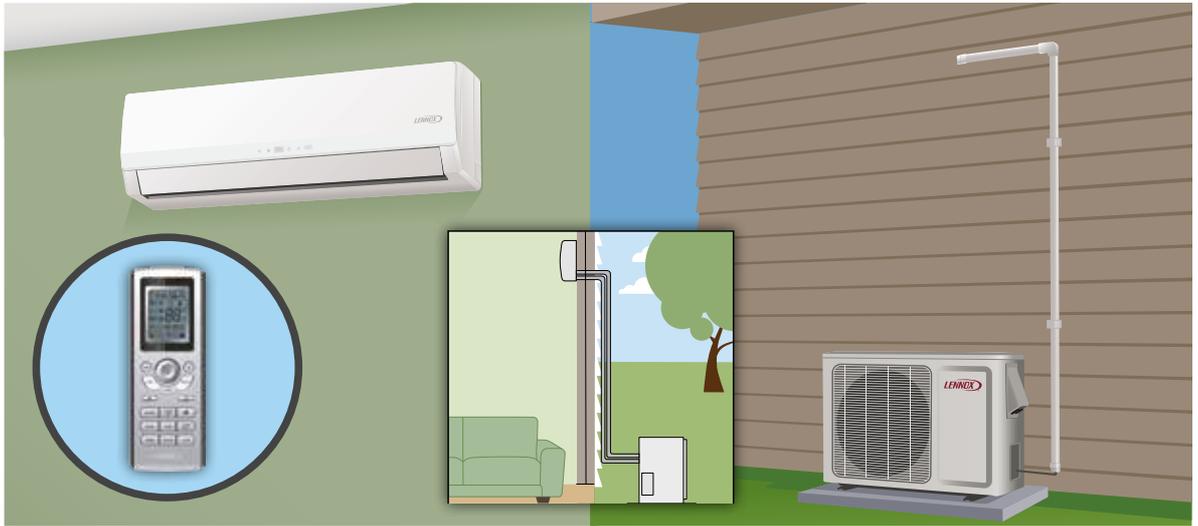

Mini-Split MS8C Specifications

Outdoor Unit Model Numbers	MS8-CO-09L MS8-CO-09P	MS8-CO-12L MS8-CO-12P	MS8-CO-18P	MS8-CO-24P
SEER	22.00	20.00	18.00	18.00
Sound (dBA)	53	55	55	56
Dimensions HxWxD (in)	21-1/4 x 30 x 12-5/8	23-1/4 x 30 x 12-5/8	27-5/8 x 35 x 15-5/8	31-1/8 x 36 x 16-7/8
HxWxD (mm)	540 x 762 x 320	591 x 762 x 320	702 x 890 x 397	790 x 914 x 427

Indoor Unit Model Numbers	MS8-CI-09L MS8-CI-09P	MS8-CI-12L MS8-CI-12P	MS8-CI-18P	MS8-CI-24P
Sound (dBA)	26–34	26–36	35–44	37–45
CFM				
Low Speed	220	215	325	355
Medium Speed	255	255	385	410
High Speed	295	275	460	470
Turbo Speed	330	305	500	590
Dimensions HxWxD (in)	10-7/8 x 33-3/8 x 7	10-7/8 x 33-3/8 x 7	11-3/4 x 37 x 8	12-3/8 x 39-3/4 x 8-5/8
HxWxD (mm)	275 x 848 x 180	275 x 848 x 180	298 x 940 x 203	315 x 1008 x 219

Note: Due to Lennox' ongoing commitment to quality, all specifications, ratings and dimensions are subject to change without notice.

**Based on sound pressure levels of the MS8-CI-09L.



For a complete list of the registered and common law trademarks owned by Lennox Industries Inc., please visit www.lennox.com.