




# Single 4-way cassette split systems

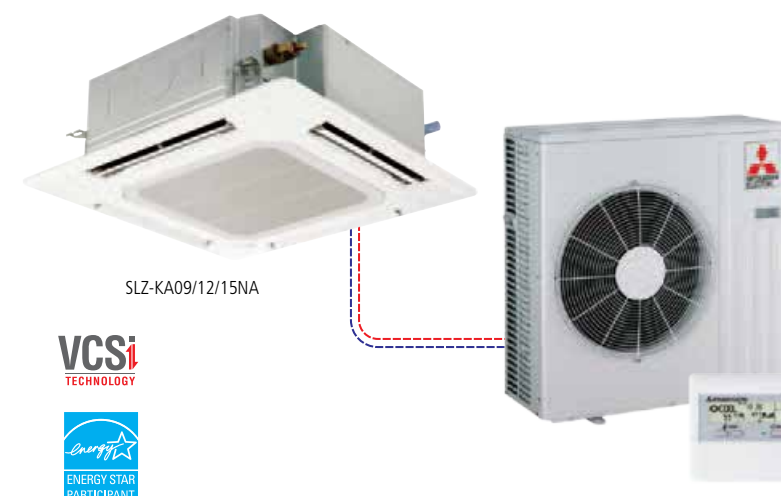

Optional accessories available.  
Visit [www.mrslim.ca](http://www.mrslim.ca) for more information.

## Heat pump

- Variable Compressor Speed Inverter Technology
- Ozone-Friendly R-410A Refrigerant
- Significant Energy Savings (up to 30%)
- Auto Change Over Between Cooling & Heating
- Super Quiet Technology
- Long-Life Filter – Up to 2,500 hrs
- Four-Way Airflow Directions
- Wide Outlets for Better Air Distribution
- Built-in High-Performance Drain Pump
- Connectable to Fresh Air Supply
- Low Ambient Heating -20°C/-4°F
- Refrigerant Pre-Charged
- 5-Year Parts Warranty
- 7-Year Compressor Warranty

Model	Indoor Unit		SLZ-KA09NA	SLZ-KA12NA	SLZ-KA15NA
	Outdoor Unit		SUZ-KA09NA	SUZ-KA12NA	SUZ-KA15NA
Capacity (Rated)	Cooling	Btu/h	8,400	11,100	15,000
Capacity (Min. ~ Max.)		Btu/h	3,100 ~ 10,900	3,400 ~ 13,300	3,800 ~ 17,700
Capacity (Rated)	Heating @ 47°F	Btu/h	10,900	13,600	18,000
Capacity (Min. ~ Max.)		Btu/h	3,100 ~ 14,100	3,100 ~ 17,100	3,100 ~ 22,200
Capacity	Heating @ 17°F	Btu/h	8,300	10,200	13,400
Power Consumption (Total Input)	Cooling	W	700	920	1,460
	Heating @ 47°F	W	930	1,180	1,950
	Heating @ 17°F	W	1,040	1,310	1,970
EER	Cooling		12.0	12.0	10.2
SEER	Cooling		15.0	15.4	16.0
HSPF (IV)	Heating		9.6	9.6	9.6
Capacity Control			Variable Speed Compressor	Variable Speed Compressor	Variable Speed Compressor
Refrigerant			R-410A	R-410A	R-410A
Power Supply	V, Phase, Hz		208/230, 1, 60	208/230, 1, 60	208/230, 1, 60
Moisture Removal	Pints/h		1.2	2.3	4.5
Airflow (Low-Med-Hi)	CFM Dry		280-320-350	280-320-390	280-320-390
Sound Indoor (Low-Med-Hi)	Cooling	dB(A)	29-32-38	30-34-39	31-35-40
Sound Outdoor	Cooling	dB(A)	46	49	49
Max. Fuse Size (Time Delay)	Indoor	A	15	15	15
	Outdoor	A	15	15	15
Min. Ampacity	Indoor	A	1.0	1.0	1.0
	Outdoor	A	12	12	12
Fan Speed Control			4 (Auto, Hi, Med, Low)	4 (Auto, Hi, Med, Low)	4 (Auto, Hi, Med, Low)
Up/Down Airflow Directions			Auto, Manual, Swing	Auto, Manual, Swing	Auto, Manual, Swing
Air Filter (Washable)			Long-Life Filter (up to 2,500 hours)	Long-Life Filter (up to 2,500 hours)	Long-Life Filter (up to 2,500 hours)
Dimension (H x W x D)	Indoor	in.	8-3/16 x 22-7/16 x 22-7/16	8-3/16 x 22-7/16 x 22-7/16	8-3/16 x 22-7/16 x 22-7/16
	Grille	in.	13/16 x 25-5/8 x 25-5/8	13/16 x 25-5/8 x 25-5/8	13/16 x 25-5/8 x 25-5/8
	Outdoor	in.	21-5/8 x 31-1/2 x 11-1/4	21-5/8 x 31-1/2 x 11-1/4	21-5/8 x 31-1/2 x 11-1/4
Weight	Indoor	lbs.	36	36	36
	Grille	lbs.	7	7	7
	Outdoor	lbs.	66	77	80
Pipe Size	Liq. X Gas	in.	1/4 x 3/8	1/4 x 3/8	1/4 x 1/2
Max. Height Difference		ft.	40	40	40
Max. Pipe Length		ft.	65	65	65
Outdoor Operating Range	Cooling		14 – 115°FDB	14 – 115°FDB	14 – 115°FDB
	Heating		-4 – 75°FDB (-5 – 65°FWB)	-4 – 75°FDB (-5 – 65°FWB)	-4 – 75°FDB (-5 – 65°FWB)

THIS SYMBOL DENOTES AN ENERGY STAR-CERTIFIED UNIT

All features may not apply to all models. Ask your dealer for details.

All test conditions are based on ARI 210/240.

Rating conditions: Cooling – Indoor: 80°FDB, 67°FWB; Outdoor: 95°FDB, 75°FWB; Rated frequency Heating – Indoor: 70°FDB, 60°FWB; Outdoor: 47°FDB, 43°FWB; Rated frequency