

# MCVST42

ZERO CLEARANCE **DIRECT VENT** SEE-THROUGH GAS FIREPLACE





# MCVST42

ZERO CLEARANCE **DIRECT VENT**SEE-THROUGH GAS FIREPLACE

Model Fuel Gas Control Input Max. Input Min. FE (P.4.1-15)

Glass Type

MCVST42N/NE Natural Millivolt / IPI 30,250 BTU 20,750 BTU 57.6% / 60.3% Tempered

MCVST42LP/LPE Propane Millivolt / IPI 29,000 BTU 23,000 BTU 54.7% / 57.3% Tempered MCVST42NH/NHE MCVST42LPH/LPHE
Natural Propane
Millivolt / IPI Millivolt / IPI
31,000 BTU 29,250 BTU
21,000 BTU 23,000 BTU
66.4% / 69.3% 67.7% / 71%
Ceramic Ceramic





- Dedicated Clean View appliance
- Millivolt or IPI valve system allows operation during a power failure with Hi/Low heat and flame adjustment
- Safety Screen Barrier



# **OPTIONAL FEATURES**

#### Fan Kit

Heat activated with variable speed control

#### Surrounds

- Hearth Mount 4" Wide (Covers 44 5/8" W x 38 1/8" H)
- Picture Frame 4" Wide (Covers 44 5/8" W x 40 1/8" H)
- Picture Frame 1 5/8" Wide (Covers 40 1/8" W x 35 5/8" H)

# Porcelain Reflective Liner

# **Brick Refractory Liner**

Traditional

# Glass Tray

For use with Bronze Glass Media, Cannonballs, and Driftwood Log Set

### **Accent Lighting**

For use with the Glass Tray

#### Log Set

Oak (8 piece) Set, and Driftwood (6 Piece) Set

#### Thermostat

Wall Mount Millivolt Thermostat or Programmable Thermostat

#### Remote Control

Thermostat on/off, Thermostat on/off modulating, Thermostat on/off modulating and fan control





# **DESIGNER CLEAN VIEW™ FIREPLACES**

Make the most of the best view in the house with our line of Zero Clearance Direct Vent See-Through Gas Fireplaces. Ideally suited for new construction or renovations anywhere in your home.

**END** 

# **OPTIONS**



Model MCVST42NH See-Through Fireplace – Natural Gas, ZCV42S2PFBL Surround Picture Frame 1 5/8" Wide, MST42GT Glass Tray, ZG5C Glass Media - Bronze x (5), RBCB1 Cannonballs, MST42PL Porcelain Liner.

# **STYLING**



M42LOG4 Oak Log Set



M42LOG3 Driftwood Log Set



RBCB1 Multi-colored Cannonballs




MP42RLT Traditional MQG5C Decorative Ember Glass

VIEW		VIEW	VIEW		
Α	43 ½16"	-	-		
В	37 <sup>1</sup> / <sub>16</sub> "	-	-		
C	33 11/16"	-	-		
D	27 3/16"	-	-		
Ε	2 1/2"	-	-		
F	32 ½"	=	-		
G	2"	=	-		
Н	3 1/8"	-	-		
	3 ½"	-	-		
J	7 1/4"	-	-		
К	-	23 1/8"	-		
L	-	24 1/4"	-		
Μ	-	-	24 1/4"		
Ν	-	=	51 ¹/4"		
0	-	=	42 7/8"		

TOP

**FRONT** 

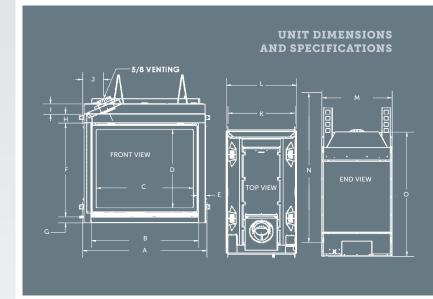

#### UNIT AND FRAMING SPECIFICATIONS (IN.)

Top Flue Models		Height Framing	Width Actual			Depth Framing
MCVST42	51 ½"	51 ³/s"	43 1/16"	43 1/8"	24 1/4"	23 1/16"



2340 Logan Avenue

Winnipeg, Manitoba, Canada R2R 2V3 Phone: (204) 632-1962 Fax: (204) 632-1960

www.kingsmanfireplaces.com

# MCVST42

ZERO CLEARANCE **DIRECT VENT** SEE-THROUGH GAS FIREPLACE





Components may have to be ordered separately to create a complete unit. Discuss with your local kingsman dealer for clarification.

(ingsman Fireplaces maintains a program of continuous testing, refinement and improvements of all its products. Some aspect of units shown here may be changed at any time without notice

or obligation. Certification: MCVST42N, MCVST42NE, MCVST42NE and MCVST42NE are Certified to ANSI 221.50-2014, CSA 2.22-2014, CSA 2.12-M91 (R2009) Vented Gas Fireplace. MCVST42NH,

MCVST42NHE, MCVST42LPH and MCVST42LPHE are Certified to ANSI 221.88-2014, CSA 2.33-2014, CSA 2.17-M91 (R2009) Vented Gas Fireplace Heater.

Printed in Canada 12/17 – B085

