

OFP42

ZERO CLEARANCE **OUTDOOR GAS FIREPLACE**





2340 Logan Avenue

Winnipeg, Manitoba, Canada R2R 2V3 Phone: (204) 632-1962 Fax: (204) 632-1960

www.kingsmanfireplaces.com

Model OFP42N OFP42LP OFP42NS OFP42LPS Fuel Natural Propane Input Max.

55,000 BTU 55,000 BTU 38,000 BTU 44,000 BTU

- Satin Coat with a Black Paint Finish and stainless steel pull screen. A great alternative when covering the front face with brick or other non combustible materials. (Satin coat steel is pretreated with a zinc coating for corrosion resistance and paint adhesion.)
- Stainless steel firebox, front and pull screens. Stainless steel provides a clean, contemporary and weather-resistant finish so that you canenjoy your fireplace for years to come.

STANDARD FEATURES*

- Hi/lo Millivolt valve with variable adjustment of flame and BTU
- A flame sensor that constantly monitors the pilot flame and provides 100% gas shut off if pilot is not sensed
- Stainless steel pull screen
- Lava Rock

Input Min.

OPTIONAL FEATURES

Surround

Stainless Steel

Remote Control On/Off

Log Set

LOGF37 Log Set - Five Pieces

Weather Cover

Stainless Steel or Black

Spark Assist

Battery Operated Pilot Burner Ignitor

Refractory Liner

Traditional or Herringbone






SCREENED PORCH INSTALLATION GUIDELINES

- Porch Area 96 sq. ft
- Ceiling Height 92"
- A minimum of two walls can be screened but must be open to outside ventilation

Minimum Screen Height - 78"

Screen Area - 64 sq. ft

Refer to installation manual for additional details of framing specifications and clearances

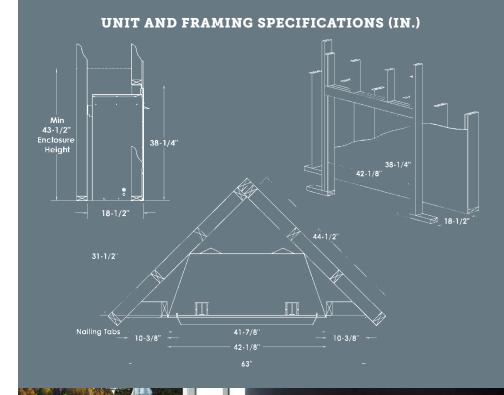



This unit illustrated is a OFP42N Outdoor Fireplace – Natural Gas, with LOGF37 Split Oak Log Set, and OFP42RLT Traditional Brick Liner.

