

VFI25

VENTED GAS FIREPLACE INSERT





2340 Logan Avenue Winnipeg, Manitoba, Canada R2R 2V3 Phone: (204) 632-1962 Fax: (204) 632-1960 www.kingsmanfireplaces.com

 Model
 VFI25N / VFI25LP

 Hi/Lo Fire Control
 Yes

 Input Max. (NG)
 25,000 - 17,000 BTU

 Input Max. (LP)
 25,000 - 17,000 BTU

 Venting
 4"

The Ultimate in Vented Fireplace Inserts, convert your wood burning fireplace to gas.

STANDARD FEATURES

 Millivolt valve system allows operation during a power failure with Hi/low heat and flame adjustment

45.9%N / 45.9%LP

- Blower with a thermostat controlled On/Off including variable speed control is standard on all models
- Spill Safety Switch in case of a blocked flue or downdraft, it will shut down the unit
- Dual burner system with glowing embers
- Bedroom and Bed Sitting Room approved
- Safety Screen Barrier



Safety Screen

OPTIONS

FE (P.4.1-15)

Log Sets

LOGC6 Five Piece Cast Split Oak Log Set with glowing ember chunks, or LOGC5 Four Piece Cast Split Oak

Grills

Available in Black, or Classic Series Black with Polish Brass, Antique or Chrome Accents

Surrounds Deluxe (3 piece)

Black with Black trim

Risers for Deluxe Surrounds

Increases height coverage by 2 1/2"

Thermostat

Wall Mount Millivolt Thermostat or Programmable Thermostat

Remote Control

On/Off, Thermostat On/Off, Thermostat On/Off modulating, Thermostat On/Off modulating




LOGC5 Split Cast Log Set

Model VFI25N Vented Fireplace Insert – Natural Gas, with V25S2640B Surround Deluxe – Black V25T2640B Trim Black, V2RZ640 Riser for Deluxe Surround VI20GBL Grills – Black and LOGC5 Log Set – Four Piece Split Oak Set.

INSERT DIMENSIONS

VF	125			
• • • •				
Α	15 ½"	D	14"	

Α	15 ½"	D	14"	G	8 1/4"
В	14"	Ε	24 1/4"	Н	16 3/4"
C	20 1/2"	F	26 1/4"		19"

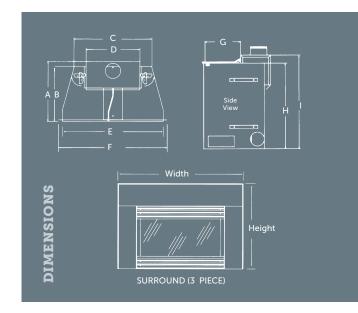

3 PIECE SURROUND DIMENSIONS (IN.)

Height	Width	Part#	
24 13/16"	36 ¹³ / ₁₆ "	V25S2436B	
LARGE	40 3/-"	V25C2640B	
	24 ¹³ /16"	24 ¹³ / ₁₆ " 36 ¹³ / ₁₆ "	24 ¹³ / ₁₆ " 36 ¹³ / ₁₆ " V25S2436B

MINIMUM SIZE FOR INSTALLATION (IN.)

Models	Front Width	Rear Width	Height	Depth
VFI25	24"	20 1/2"	17 ½"	16"



Look for the **EnerGuide** Gas Fireplace Energy Efficiency Rating in this brochure





Components may answer to be ordered separately to create a complete unit. Uncluss with your local its instantanear for clarification. Kingsman Fireplaces maintains a program of continuous testing, refinement and improvements of all its products. Some aspect of units shown here may be changed at any time without notice or obligation.

Certification The model VEI/S is certified for Canada and USA: ANSI 271.88-2014. CSA 2-33-2014. CGA 2-17-M91 (R2009) Vented Gas Fireplace Heater.

