


LANDMARK®

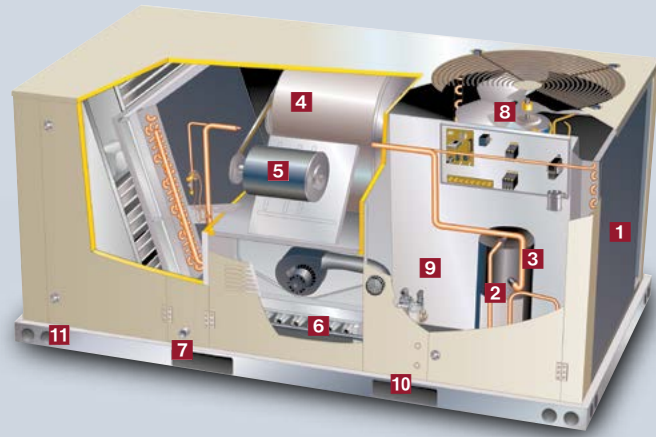

- 1 Environ™ Coil System:** Uses up to 52% less refrigerant, is up to 59% lighter and has up to 20% fewer brazed joints than typical units.
- 2 Scroll Compressor:** Standard on all units for reliable long-term operation.
- 3 High-Pressure Switch:** Improves reliability by safeguarding compressor from extreme operating conditions.
- 4 Slide-Out Blower:** Reduces time needed to adjust fan speed, belt tensioning or blower cleaning.
- 5 Predefined Supply Fan Motor/Drive Combinations:** Make selecting components to meet static and airflow requirements quick and easy.
- 6 Easy-Access Gas Compartment:** Allows access to all gas components.
- 7 Corrosion-Resistant, Removable Drain Pan:** Provides application flexibility, durability and improved serviceability. Bottom drain capability also standard.

- 8 Independent Motor Mount:** Allows for easy and efficient service access without removing the top panel.
- 9 Isolated Compressor Compartment:** Allows performance check during normal compressor operation without disrupting airflow.
- 10 Fork Slots on Three Sides:** Easy to pick up and transport units from almost any angle.
- 11 Full-Perimeter Base Rail (with Rigging Holes):** Provides greater structural integrity, so the unit is easier to handle when rigging and transporting.

Landmark high-efficiency rooftop unit performance specifications

		COOLING DATA		HEATING INPUT				PHYSICAL DATA			
NOM. TON	MODEL	EER	IEER	LOW	STD.	MED.	HIGH	DIMENSIONS H X W X L [INCHES]	SHIP WT. [LBS.]		
GAS/ ELECTRIC UNITS	6	KGB072H4B / KGB074H4T	12.0	13.5/16.0	—	65	108	150	47 x 47 x 86	690	
	7.5	KGA092H4B/M	12.5	13.0/14.0	—	130	180	240	47 x 61 x 102	1,185	
	8.5	KGA102H4B/M	12.2	12.9/14.0	—	130	180	240	47 x 61 x 102	1,192	
	10	KGA120H4B/M	12.0	13.0/13.8	—	130	180	240	47 x 61 x 102	1,227	
	13	KGA156H4B/M	12.0	13.6/14.1	—	260	360	—	55 x 92 x 108	2,135	
	15	KGA180H4B/M	12.0	13.5/13.7	—	260	360	480	55 x 92 x 133	2,315	
	17.5	KGA210H4B/M	12.0	13.0/14.0	—	260	360	480	55 x 92 x 133	2,440	
20	KGA240H4B/M	12.0	13.2/14.5	—	260	360	480	55 x 92 x 133	2,525		
				KW RANGE							
ELECTRIC/ ELECTRIC UNITS	6	KCB072H4B / KCB074H4T	12.0	13.5/16.0	7.5	15.0	22.5	30.0	—	47 x 47 x 86	661
	7.5	KCA092H4B/M	12.7	13.0/14.0	7.5	15.0	22.5	30.0	45.0	47 x 61 x 102	1,137
	8.5	KCA102H4B/M	12.4	12.9/14.0	7.5	15.0	22.5	30.0	45.0	47 x 61 x 102	1,144
	10	KCA120H4B/M	12.2	13.2/14.0	15.0	22.5	30.0	45.0	60.0	47 x 61 x 102	1,179
	13	KCA156H4B/M	12.0	13.6/14.1	15.0	30.0	45.0	60.0	—	55 x 92 x 108	1,985
	15	KCA180H4B/M	12.0	13.5/13.7	15.0	30.0	45.0	60.0	—	55 x 92 x 133	2,165
	17.5	KCA210H4B/M	12.0	13.0/14.0	15.0	30.0	45.0	60.0	90.0	55 x 92 x 133	2,290
20	KCA240H4B/M	12.0	13.2/14.5	15.0	30.0	45.0	60.0	90.0	55 x 92 x 133	2,375	
				47 CAP.	HSPF/COP 47	17 CAP.	COP 17				
HEAT PUMPS	2	KHB024H4D	13.0	16.5	24,000	8.3/3.88	13,000	2.34	39 x 47 x 86	608	
	3	KHB036H4D	12.7	16.0	35,600	8.5/3.9	19,200	2.4	39 x 47 x 86	608	
	4	KHB048H4D	12.8	16.0	46,000	8.5/3.9	26,000	2.46	47 x 47 x 86	681	
	5	KHB060H4D	12.5	16.0	59,000	8.5/3.76	34,000	2.46	47 x 47 x 86	787	
	7.5	KH/DB092H4B/M	12.1	12.9/14.2	86,000	3.6	51,000	2.40	47 x 61 x 102	1,158	
	8.5	KH/DB102H4B/M	12.0	12.5/14.3	100,000	3.6	58,000/ 56,000	2.40	47 x 61 x 102	1,160	
10	KH/DB122H4M	12.3	14.8	116,000	3.6	70,000	2.4	47 x 61 x 125	1,301		

Landmark standard-efficiency rooftop unit performance specifications

	NOM TON.	MODEL	COOLING DATA		HEATING INPUT				PHYSICAL DATA		
			EER	SEER OR IEER	LOW	STD.	MED.	HIGH	DIMENSIONS H X W X L [INCHES]	SHIP WT. [LBS.]	
GAS/ELECTRIC UNITS	2	KGB024S4D	12.7	14.0	—	65	—	—	39 x 47 x 86	571	
	2.5	KGB030S4D	11.5	14.0	—	65	—	—	39 x 47 x 86	574	
	3	KGB036S4B/D	12.5	14.0	—	65	108	—	39 x 47 x 86	596	
	4	KGB048S4B/D	11.5	14.0	—	65	108	150	39 x 47 x 86	596	
	5	KGB060S4B/D	11.8	14.0	—	65	108	150	47 x 47 x 86	690	
	6	KGB074S4B/T	11.0/11.2	12.7/15.0	—	65	108	150	47 x 47 x 86	690	
	7.5	KGB090S4B/T	11.0	12.7/14.0	—	—	108	150	47 x 47 x 99	843	
	7.5	KGB092S4B	11.2	12.7	—	130	180	240	47 x 61 x 102	1,003	
	7.5	KGA092S4M	11.0	13.0	—	130	180	240	47 x 61 x 102	1,003	
	8.5	KGA102S4M	11.0	13.0	—	130	180	240	47 x 61 x 102	1,023	
	8.5	KGB102S4B	11.0	12.7	—	130	180	240	47 x 61 x 102	1,023	
	10	KGA120S4M	11.0	13.0	—	130	180	240	47 x 61 x 102	1,071	
	10	KGB120S4B	11.0	12.7	—	130	180	240	47 x 61 x 102	1,071	
	12.5	KGB150S4B/M	10.8	12.2 / 13.5	—	130	180	240	47 x 61 x 102	1,200	
	15	KGA180S4M	10.8	12.6	—	260	360	480	55 x 92 x 108	1,990	
	15	KGB180S4B	10.8	12.2	—	260	360	480	55 x 92 x 108	2,055	
	17.5	KGA210S4M	10.8	13.1	—	260	360	480	55 x 92 x 108	2,135	
17.5	KGB210S4B	10.8	12.2	—	260	360	480	55 x 92 x 108	2,165		
20	KGA240S4M	10.8	13.0	—	260	360	480	55 x 92 x 133	2,380		
20	KGB240S4B	10.8	12.2	—	260	360	480	55 x 92 x 133	2,380		
25	KGB300S4B/M	10.5	11.4 / 13.8	—	260	360	480	55 x 92 x 133	2,650		
					KW RANGE*						
ELECTRIC/ELECTRIC UNITS	2	KCB024S4D	12.7	14.0	5.0	7.5	10.0	—	—	39 x 47 x 86	543
	2.5	KCB030S4D	11.5	14.0	5.0	7.5	10.0	—	—	39 x 47 x 86	586
	3	KCB036S4B/D	12.5	14.0	7.5	15.0	—	—	—	39 x 47 x 86	568
	4	KCB048S4B/D	11.5	14.0	7.5	15.0	—	—	—	39 x 47 x 86	568
	5	KCB060S4B/D	11.8	14.0	7.5	15.0	22.5	—	—	47 x 47 x 86	661
	6	KCB074S4B/T	11.2	12.9/15.0	7.5	15.0	22.5	30.0	—	47 x 47 x 86	661
	7.5	KCB090S4B/T	11.2	12.9/14.0	7.5	15.0	22.5	30.0	—	47 x 47 x 99	805
	7.5	KCB092S4B	11.2	12.9	7.5	15.0	22.5	30.0	45.0	47 x 47 x 99	805
	7.5	KCA092S4M	11.2	13.2	7.5	15.0	22.5	30.0	45.0	47 x 61 x 102	955
	8.5	KCA102S4M	11.2	13.5	7.5	15.0	22.5	30.0	45.0	47 x 61 x 102	975
	8.5	KCB102S4B	11.2	12.9	7.5	15.0	22.5	30.0	45.0	47 x 61 x 102	975
	10	KCA120S4M	11.2	13.2	15.0	22.5	30.0	45.0	60.0	47 x 61 x 102	1,023
	10	KCB120S4B	11.2	12.9	15.0	22.5	30.0	45.0	60.0	47 x 61 x 102	1,023
	12.5	KCB150S4B/M	11.0	12.4/13.5	15.0	22.5	30.0	45.0	60.0	47 x 61 x 102	1,152
	15	KCA180S4M	11.0	12.8	15.0	30.0	45.0	60.0	—	55 x 92 x 108	1,840
	15	KCB180S4B	11.0	12.4	15.0	30.0	45.0	60.0	—	55 x 92 x 108	1,905
	17.5	KCA210S4M	11.0	13.3	15.0	30.0	45.0	60.0	90.0	55 x 92 x 108	1,985
17.5	KCB210S4B	11.0	12.4	15.0	30.0	45.0	60.0	90.0	55 x 92 x 108	2,015	
20	KCA240S4M	11.0	13.2	15.0	30.0	45.0	60.0	90.0	55 x 92 x 133	2,230	
20	KCB240S4B	11.0	12.4	15.0	30.0	45.0	60.0	90.0	55 x 92 x 133	2,230	
25	KCB300S4B/M	10.5	11.6/13.8	15.0	30.0	45.0	60.0	90.0	55 x 92 x 133	2,500	
					47 CAP.	HSPF/COP 47	17 CAP.	COP 17			
HEAT PUMPS	2	KHB024S4D	11.7	14.0	25,000	8.0/3.76	14,400	2.28	39 x 47 x 86	607	
	2	KDB024H4E	13	16.5	24,000	8.30/3.88	13,000	2.34	39 x 47 x 86	635	
	2.5	KHB030S4D	11.9	14.0	30,000	8.0/3.72	16,200	2.3	39 x 47 x 86	607	
	3	KHB036S4B/D	11.5	14.0	36,600	8.0/3.64	20,400	2.32	39 x 47 x 86	607	
	3	KDB036H4E	12.7	16.0	35,000	8.50/3.90	19,200	2.40	39 x 47 x 86	635	
	3	KDB036H4T	12	15.0	35,000	8.30/3.64	19,200	2.22	39 x 47 x 86	635	
	4	KHB048S4B/D	11.4	14.0	47,500	8.0/3.72	27,400	2.4	47 x 47 x 86	682	
	4	KDB048H4E	12.8	16.0	46,000	8.50/3.90	26,000	2.46	47 x 47 x 86	710	
	4	KDB048H4T	12	15.0	46,000	8.30/3.82	26,000	2.38	47 x 47 x 86	710	
	5	KHB060S4B	11.9	14.0	58,000	8.0/3.72	33,000	2.38	47 x 47 x 86	727	
	5	KDB060H4E	12.5	16.0	59,000	8.50/3.70	34,000	2.46	47 x 47 x 99	816	
	5	KDB060H4T	12.0	15.0	59,000	8.30/3.64	34,000	2.46	47 x 47 x 99	816	
	6	KHA072S4B	11.0	12.2	70,000	3.3	40,000	2.25	47 x 47 x 99	810	
	6	KHB074S4T	11.0	14.0	70,000	3.3	40,000	2.25	47 x 47 x 99	810	
	7.5	KHA092S4M	11.0	12.5	89,000	3.3	53,000	2.25	47 x 61 x 102	1,137	
	8.5	KHA102S4M	11.0	12.5	100,000	3.3	55,000	2.25	47 x 61 x 102	1,169	
	10	KHA120S4M	11.0	12.5	115,000	3.3	70,000	2.25	47 x 61 x 102	1,235	
12.5	KHA150S4M	10.6	12.0	138,000	3.2	82,000	2.05	47 x 61 x 125	1,435		
15	KHA180S4M	10.6	13.2	178,000	3.2	100,000	2.05	55 x 92 x 130	2,150		
20	KHA240S4M	10.6	13.0	220,000	3.2	124,000	2.05	55 x 92 x 130	2,350		

Direct-drive blower motors available for 2- to 5-ton models.

NOTE: Due to Lennox' ongoing commitment to quality, all specifications, ratings and dimensions are subject to change.